

5.3.3.6 Reports and Utilities

The **Reports and Utilities** window operates two window options based on the extent that the user has permission to access the database and to access a particular OPLANs:

- The **{Delete/List Carriers}** window option permits the prescribed user to generate reports that list the carriers on an OPLAN or on the database. This option also permits the prescribed user to delete carriers on the OPLAN or on the database.
- The **{Delete TCC Interface Files for an OPLAN}** window option permits the prescribed user to delete TCC Interface files for an OPLAN.

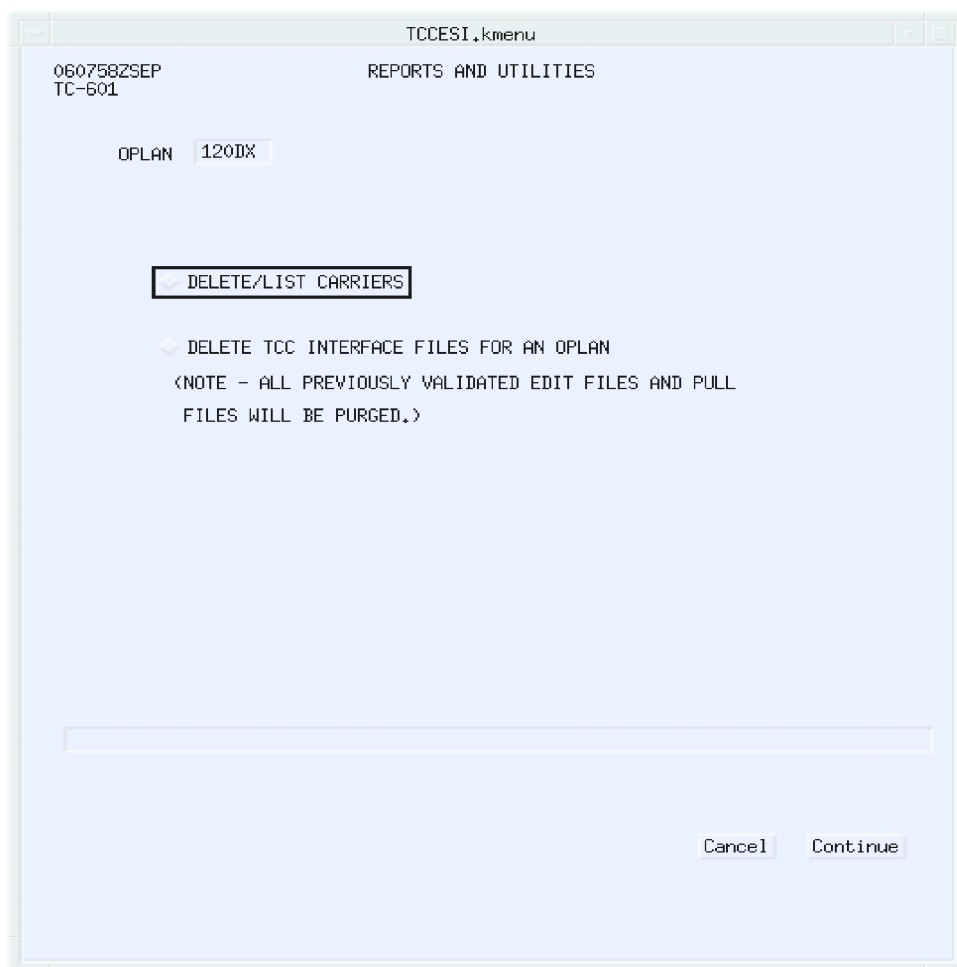


Figure 5.3.3.6-1. Reports and Utilities Window

5.3.3.6.1 Delete/List Carriers

Selecting the **{Delete/List Carriers}** option and clicking **{Continue}** presents the user with the **Delete/List Carriers** window shown in Figure 5.3.3.6.1-1.

TCCESI.kmenu

060806ZSEP
TC-602

OPLAN 120DX

SELECT OPTION ☒ LIST CARRIERS ON OPLAN
☐ LIST CARRIERS ON DATABASE
☐ DELETE CARRIERS ON OPLAN

CARRIERS ☐ ALLOCATED ☐ UNALLOCATED
☐ MANIFESTED ☐ UNMANIFESTED
☐ ALL CARRIERS

SOURCE(S) ☐ AMC ☐ MTMC ☐ MSC ☐ ORG ☐ ALL SOURCES

LIMIT ORGANIC BY - PROVORG SERVICE

CARRIER DATE RANGE (RELATIVE OR ZULU DATES APPLY TO FIRST ONLOAD DEPARTURE)
(CXXHHMM) (CXXHHMM) (DDHHMMZMMYY) (DDHHMMZMMYY)
FROM TO FROM TO

CARRIER NAME RANGE FIRST LAST

Cancel Continue

Figure 5.3.3.6.1-1. Delete/List Carriers Window

The **{Select Option}** section on the window indicates three processes that the user can choose to accomplish. An option must be selected or a message will display to prompt the user to make a selection. Selections in the Carrier and Source(s) sections of the window are also required. The option to delete carriers, however, requires additional permissions that are not granted to the normal user. Users authorized to execute the delete carriers function must be granted the requisite permissions by the Functional Manager/SA. Carriers can be specified as to the type desired. Any or all of the first four carriers: allocated, unallocated, manifested, or unmanifested may be selected. Clicking **{ALL SOURCES}** is an alternative to manually selecting the four types individually.

Source can be specified individually, or by specifying **{ALL SOURCES}**. The selection of LIMIT ORGANIC BY will require a specification of the appropriate providing organization by clicking

{PROVORG} and/or **{SERVICE}**. The providing organization codes are one character, alpha or numeric, that can be found in the JOPES Users Guide, TD 18-14-3 (see Section 2.0, Reference d.). The service codes are one character, alpha or numeric, that also can be found in the JOPES Users Guide, dated May 15, 1996, (see Section 2.0, Reference item f.).

Carriers can be further limited by the selection of a carrier date range. The date range is not a required entry. This date range applies to the first onload departure date. If First Deployment Commences (C-day) has been declared for the plan, the relative date format can be used, such as C0031200, which is 3 days after C-day has been declared at 1200 hours. A *from* and *to* date must be entered to limit the time span for the retrieval. If C-day has not been declared for the plan a Zulu date may be entered. Format for the Zulu date is DDHHMMZMMYY. This entry requires a calendar day, the hour and minute in a 24 hour day, the Z indicating Zulu, the first three letters of the month and the last two digits of the year from 1991 through 2000. In these date ranges the *from* date must be prior to the *to* date.

Carriers can be further limited by the selection of a Carrier Name Range. The selection must be in ascending order and all carriers between and including the *FIRST* and *LAST* Carrier Name Range apply to this selection.

Clicking **{Cancel}** displays the main **TCC Interface Subsystem Menu** window (see Paragraph 5.3.1).

Clicking **{Continue}** posts the **Reports and Utilities** window with the message "Requested Action Completed Successfully."

An example of the report produced for the carrier type and source selected is shown in Paragraph D.3, Carrier Reports, of Appendix D, Sample Reports.

5.3.3.6.2 Delete TCC Interface Files

The **Reports and Utilities** window **{Delete TCC Interface files for an OPLAN}** option (see Figure 5.3.3.6-1) deletes the support files for the OPLAN specified. The support files are maintained in a directory having the OPLAN ID for its name. The files to be deleted include cycle-to-cycle compare files along with any pull files created. This action is typically done once an OPLAN is moved to an archive after all actions have been completed for the entire OPLAN. After clicking **{Continue}** a message is displayed on this window indicating the action has been taken.